


MOUNTING FILMS

PERMANENT AND
REMOVABLE POLYESTER

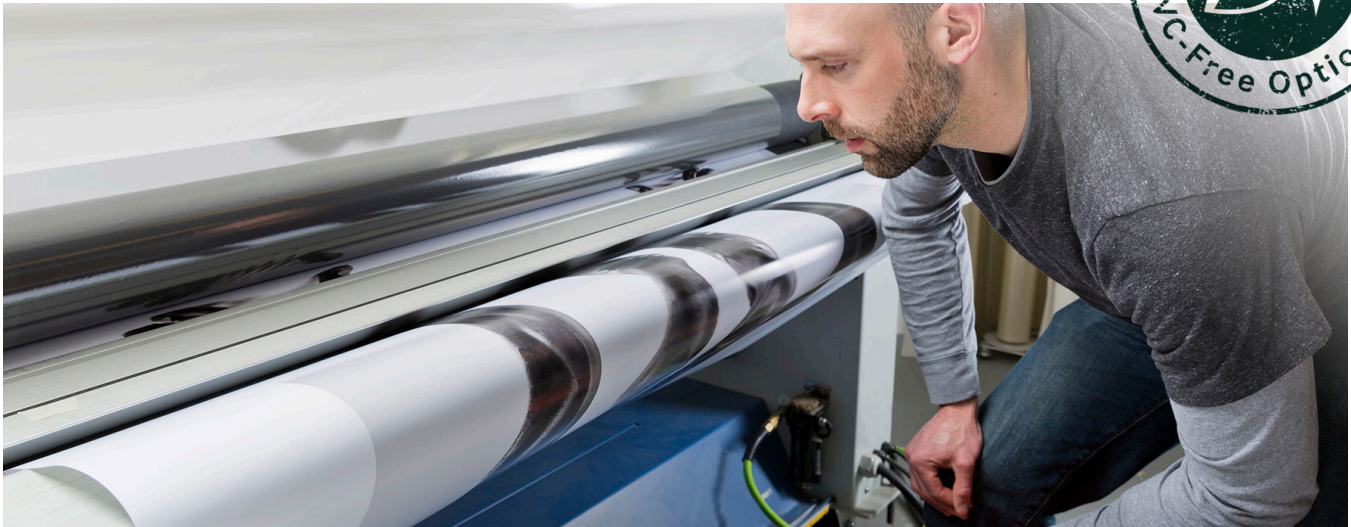

Easily convert non-adhesive backed films to pressure sensitive materials with either a permanent or removable mounting film.

Mounting Films

Offered in a variety of gauges and adhesive combinations

Water-resistant for excellent indoor durability (<3 years indoors)

Printed film liners and self-wound liners available

Available with a clear film air-egress printed release liner option

Available in wide format rolls - custom sizes available upon request



This logo represents Nekoosa's commitment to offering sustainable alternatives to traditional PVC materials. 100% of this product line is PVC-Free.

Applications

Window Graphics
(Push/Pull Graphics)

Posters

Medical Applications

Switches

Mouse Pads

Decals

MOUNTING FILMS | PERMANENT AND REMOVABLE POLYESTER



STOCKED PRODUCTS ▶

Color	SKU #	Film Thickness	Side 1		Side 2		Durability	Size
			Adhesive	Liner	Adhesive	Liner		
Permanent/Permanent								
White	▶ CMTT200WLS150	2 mil	Permanent	40# C2S	Permanent	N/A	3 years	51" x 50 yd
	▶ CMTT200WLS450		Permanent	40# C2S	Permanent	N/A	3 years	54" x 50 yd

Color	SKU #	Film Thickness	Side 1		Side 2		Durability	Size
			Adhesive	Liner	Adhesive	Liner		
Permanent/Removable								
Optically Clear	▶ CMTT100PR3850	1 mil	Permanent	Clear Film	Removable	Clear Printed Film	3 years	38" x 50 yd
	▶ CMTT100PR5150		Permanent	Clear Film	Removable	Clear Printed Film	3 years	51" x 50 yd
	▶ CMTT100PR5450		Permanent	Clear Film	Removable	Clear Printed Film	3 years	54" x 50 yd
Clear	▶ CMTT100SLPR3850	1 mil	Permanent	N/A	Removable	40# C2S	3 years	38" x 50 yd
	▶ CMTT100SLPR5150		Permanent	N/A	Removable	40# C2S	3 years	51" x 50 yd
	▶ CMTT100SLPR5450		Permanent	N/A	Removable	40# C2S	3 years	54" x 50 yd
Clear	▶ CMTT100AEP3850	1 mil	Permanent	Clear Film	Removable	Clear Printed Air-Egress Film	3 years	38" x 50 yd
	▶ CMTT100AEP5150		Permanent	Clear Film	Removable	Clear Printed Air-Egress Film	3 years	51" x 50 yd
	▶ CMTT100AEP5450		Permanent	Clear Film	Removable	Clear Printed Air-Egress Film	3 years	54" x 50 yd

 = PVC-Free

MOUNTING FILMS

PERMANENT AND
REMOVABLE POLYESTER

TECHNICAL DATA ▶

		Permanent/Permanent	Permanent/Removable		
Physical Properties					
Opacity		White	Optically Clear	Clear	Clear with Air Egress
Thickness	Film	2.0 mil White Polyester	1.0 mil Polyester Carrier Film	1.0 mil Clear Polyester	1.0 mil Polyester Carrier Film
	Adhesive	P84 white acrylic pressure activated permanent	P-82 clear activated acrylic/ Clear Printed Film*	P82 clear acrylic pressure activated permanent	1.4-mil ± 0.2 mil clear polyester/Silicone- coated on one side*
	Liner	40# (3.0 ± 0.2 mil)	Clear Film (2.0 ± 0.2 mil)/Clear Printed Film (2.0 ± 0.2 mil)**	55# (3.0 +/- 0.2 mil)/ Clear Air Egress Printed Film**	Clear Film (1.4 ± 0.2 mil)/ Clear Film (4.5 ± 0.2 mil)**
Overall Thickness		8.0 ± 0.2 mil	7.0 ± 0.2 mil	6.0 ± 0.2 mil	8.9 ± 0.3 mil

Conditions for Use	
Shelf Life	1 year***
Indoor Durability	Up to 3 years
Min. Application Temp.	40° F (4.4° C)
Service Temp. Range	-20° F to 150° F (-126° C to 65° C)
Water Resistant	Excellent†
Solvent Resistant	Good††

*First adhesive/second adhesive liner
**First release liner/second release liner
***When stored at 70°F and 50% relative humidity.
†Test piece (with vinyl face film applied) ages 24 hrs. applied to stainless steel is not affected when immersed in 70° F water for seven days.
††For most petroleum based solvents. Edge sealing is recommended in high solvent exposure areas



The information provided herein is correct to the best of Nekoosa's knowledge. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.