



Intended for use in the production of high quality graphics, Wall Graphics® vinyl has an ultra removable and reusable adhesive ideal for decal applications.

## Applications

- Wall Advertising Graphics
- P.O.P. Wall Signage
- Wayward Signage
- Reusable Signage

## Wall Graphics

Microsphere adhesive creates an ultra-removable and repositionable material

Removes easily without leaving a trace of residue behind, no solvents needed

For indoor and outdoor use

Made in the U.S.A.


Available in white and clear

Available in 6 mil white on a 90# stayflat paper liner

**Printer Compatibility:** HP Indigo

## Easy to apply and remove from these surfaces:



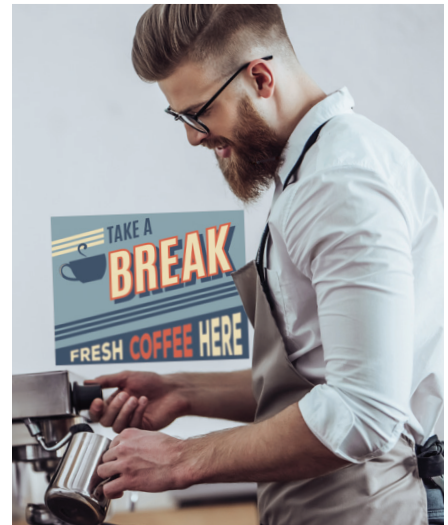

## STOCKED PRODUCTS ▶

HP Indigo	Finish/Color	SKU #	Size	Thickness	GSM	M Wgt	Sheets/Carton
	Matte White	67130	12" x 18"	6 mil	360	116.7	300
		67131	13" x 19"			133.3	

Certified for  
HP Indigo



Nekoosa has 3 conveniently located converting facilities for quick shipping of custom sheets.

## TECHNICAL DATA ▶

### Physical Properties

<b>Adhesive</b>	Microsphere Ultra Removable
<b>Film</b>	Flexible Vinyl
<b>Finish</b>	Matte
<b>Color</b>	White
<b>Liner</b>	Paper
<b>Film Thickness</b>	6 mil (6.0 ± 0.2 mil)
<b>Liner Thickness</b>	90# (6.5 ± 0.2 mil)
<b>Weight</b>	380 gsm
<b>Adhesion</b>	5 ± 2 oz/in
<b>Surface Tension</b>	36 Dynes Average

### Conditions for Use

<b>Shelf Life</b>	1 year*
<b>Min. Application Temp.</b>	40° F (4.4° C)
<b>Service Temp.</b>	-10° F to 140° F (-23.3° C to 60° C)
<b>Outdoor Durability</b>	1 year**
<b>Indoor Durability</b>	Up to 2 years
<b>Chemical Resistance</b>	Good***
<b>Water Resistance</b>	Excellent
<b>Material Reuse</b>	Yes†
<b>Fire Rating</b>	UL 94 V-0

\*When stored at 75° F and 50% relative humidity.

\*\*Mid-continental USA vertical exposure.

\*\*\*Good for most petroleum solvents and lower aliphatic alcohols. For ultimate solvent resistance, edge sealing is recommended.  
†Printed decals can be reused if properly handled.

### Additional Information:

- Must be applied dry to dry (not wet) walls
- Not suitable for overlaminates
- Panels must be setup in "portrait" orientation

Certified for  
HP Indigo

The information provided herein is correct to the best of Nekoosa's knowledge. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.