


# WALL GRAPHICS®

REMOVABLE  
WALL FILMS

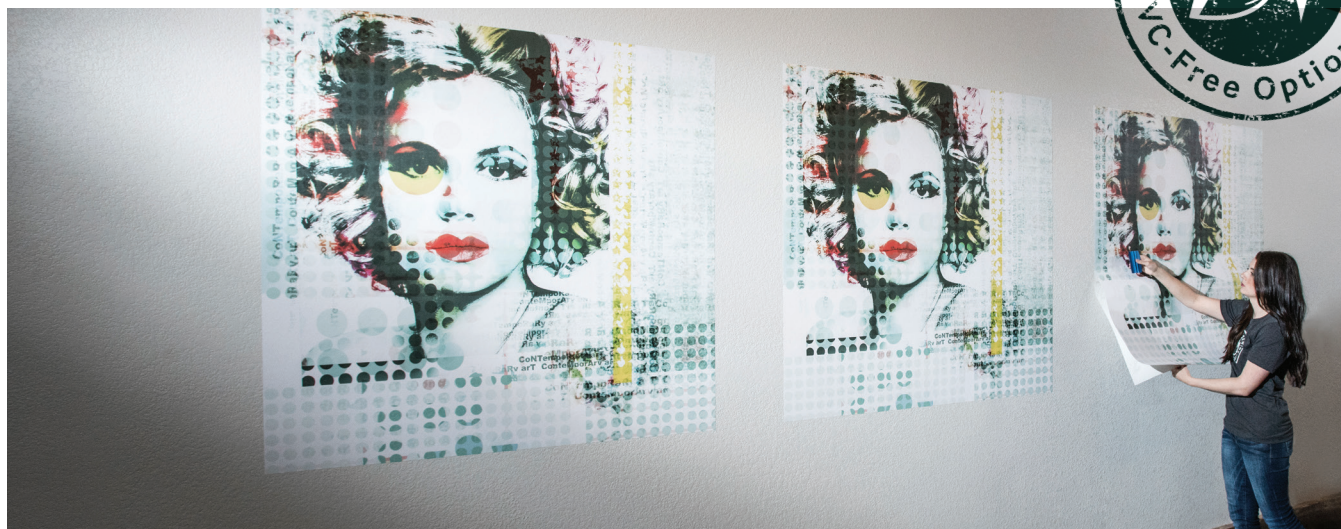

Nekoosa's Wall Graphics® portfolio is a comprehensive offering of repositionable, easily removable films for interior and exterior wall graphic applications.

## Wall Graphics

Microsphere Removable Adhesive	High-Peel Removable Adhesive
<ul style="list-style-type: none"> <li>• Matte white or gloss white finishes</li> <li>• 4, 6 and 8 mil facestock rated for &lt;3 years of outdoor use</li> <li>• Augusta Wall Graphics® 6 mil semi-rigid textured embossed with 90# layflat polycoated paper liner also available</li> <li>• Suitable for short term indoor and outdoor applications (&lt;1 year clean removability from application surfaces)</li> <li>• Recommended application surfaces: smooth, flat painted walls, wall paper, wood paneling, concrete, polished stone, stainless steel, glass</li> </ul>	<ul style="list-style-type: none"> <li>• High-peel adhesive properties allow for a broader range of application surfaces – painted plywood, textured walls and low-to-no VOC paints</li> <li>• 6 mil semi-rigid matte white facestock rated for &lt;3 years of outdoor use</li> <li>• Options available with a 90# layflat or 90# air-egress layflat polycoated paper liner</li> <li>• Suitable for indoor and outdoor applications (&lt;6 months clean removability from application surfaces)</li> <li>• Recommended application surfaces: painted plywood, textured walls, sheetrock, concrete and cinder block</li> </ul>

High opacity films with an excellent white point

Stable 90# layflat polycoated paper liner for ease of printing and installation

**Print Compatibility:** Wide Format (Solvent, Eco-Solvent, Latex and UV), Offset (Conventional and UV), HP Indigo and Screen

**NEW PVC-FREE**  **Wall Graphics® Matte White:** 4 mil. matte white film designed with a 90# layflat release liner and microsphere removable adhesive. Enhanced topcoat for Latex and UV wide format printing with outdoor durability up to 4 years.



This logo represents Nekoosa's commitment to offering sustainable alternatives to traditional PVC materials. We're happy to offer a PVC-Free option in this product line.

## Applications

Interior and Exterior Wall Graphics

Wall Décor

Point-of-Purchase Wall Signage

Renovation Barricades

Wayward Signage

Posters

Textured Wall Graphics

Certified for  
HP Latex Inks

Certified for  
HP Indigo



# WALL GRAPHICS®

REMOVABLE  
WALL FILMS



## STOCKED PRODUCTS ▶

	Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	Rolls/Carton
<b>Wide Format</b>							
Matte White		SPMWGW5450	54" x 50 yd	4 mil	Microsphere Removable	90# Layflat	1
		SPMWGW6050	60" x 50 yd				1
		SPMWG5450PP	54" x 50 yd				1
		SPMWG65450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1
		SPMWG66050	60" x 50 yd				1
		SPM600FW/R5450	54" x 50 yd	6 mil	High-Peel Removable	90# Layflat	1
		SPE600FW/R5450	54" x 50 yd			90# Layflat Air-Egress	1
Gloss White		SPMWG85450	54" x 50 yd	8 mil	Microsphere Removable	90# Layflat	1
Augusta Embossed Matte White		SPMWG6G5450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1
		SPMAUG5450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1

	Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	M Wgt	Sheets/Carton
<b>HP Indigo</b>								
Matte White		SPMWG6IN1218	12" x 18"	6 mil	Microsphere Removable	90# Layflat	116.7	300
		SPMWG6IN1319	13" x 19"				133.3	300

= PVC-Free



**NEKOOSA BUCKS**

available in select rolls listed above.

Easy to apply and remove from these surfaces:

Microsphere Removable

WALL PAPER	WOOD PANELING	POLISHED STONE	GLASS	STAINLESS STEEL	SMOOTH PAINTED WALLS
TEXTURED PAINTED WALLS	LOW VOC PAINT	CONCRETE	PAINTED PLYWOOD		

High-Peel Removable



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

10.10.23



# WALL GRAPHICS®

REMOVABLE  
WALL FILMS



## STOCKED PRODUCTS ▶

Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	Rolls/Carton
<b>Wide Format</b>						
Matte White	SPMWGW5450	54" x 50 yd	4 mil	Microsphere Removable	90# Layflat	1
	SPMWGW6050	60" x 50 yd				1
	SPMWG5450PP	54" x 50 yd				1
	SPMWG65450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1
	SPMWG66050	60" x 50 yd				1
	SPM600FW/R5450	54" x 50 yd	6 mil	High-Peel Removable	90# Layflat	1
Gloss White	SPE600FW/R5450	54" x 50 yd			90# Layflat Air-Egress	1
	SPMWG85450	54" x 50 yd	8 mil	Microsphere Removable	90# Layflat	1
	SPMWG6G5450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1
Augusta Embossed Matte White	SPMAUG5450	54" x 50 yd	6 mil	Microsphere Removable	90# Layflat	1

Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	M Wgt	Sheets/Carton
<b>HP Indigo</b>							
Matte White	SPMWG6IN1218	12" x 18"	6 mil	Microsphere Removable	90# Layflat	116.7	300
	SPMWG6IN1319	13" x 19"				133.3	300

= PVC-Free



**NEKOOSA BUCKS**

available in select rolls listed above.

Easy to apply and remove from these surfaces:

Microsphere Removable

WALL PAPER	WOOD PANELING	POLISHED STONE	GLASS	STAINLESS STEEL	SMOOTH PAINTED WALLS
TEXTURED PAINTED WALLS	LOW VOC PAINT	CONCRETE	PAINTED PLYWOOD		

High-Peel Removable



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

10.10.23

## TECHNICAL DATA ▶

Conditions for Use		
Shelf Life		1 year
Clean Removability	W79	Up to 1 year
	R45	Up to 6 months
Outdoor Durability		Up to 3 years
Min Application Temp		40° F (4° C)
Service Temp Range		-20° to 150° F (-29° to 66° C)
Solvent Resistance		Good*
Water Resistance		Excellent

### CPSIA Compliant

\*Good for most petroleum solvents and lower aliphatic alcohols.  
For ultimate solvent resistance, edge sealing is recommended.

### Additional Information:

- Augusta Wall Graphics® is not suitable for overlaminates.
- For installation instructions, visit our website.

## Wide Format

Physical Properties		SPMWGW	SPMWG6G	SPMAUG	SPMWGPP
Finish		Matte	Gloss	Embossed Matte	Matte
Color		White	White	White	White
Adhesive		Microsphere Removable - W79	Microsphere Removable - W79	Microsphere Removable - W79	Microsphere Removable - W79
Film		Calendered Vinyl	Calendered Vinyl	Calendered Vinyl	Polypropylene
Liner		90# Layflat	90# Layflat	90# Layflat	90# Layflat
Opacity		92% Minimum	95% Minimum	95% Minimum	85% Minimum
Gloss Level		8% Typical	90% Typical	2% Typical	8% Typical
Thickness	Film	3.2 ± 0.2 mil	5.5 ± 0.2 mil	6 ± 0.2 mil	3.6 ± 0.2 mil
	Film w/ Adhesive	3.9 ± 0.2 mil	6.5 ± 0.2 mil	6.7 ± 0.2 mil	4.3 ± 0.2 mil
	Total Thickness	10.5 ± 0.4 mil	13.0 ± 0.4 mil	13.2 ± 0.4 mil	10.8 ± 0.5 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in	16 - 20 oz/in	16-20 oz/in	10-15 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in	23- 27 oz/in	23-27 oz/in	13-17 oz/in
Weight	Film w/ Adhesive	130-135 gsm	210-215 gsm	265-270 gsm	105-115 gsm
	Total w/ Liner	280-290 gsm	360-365 gsm	410-420 gsm	220-260 gsm
Printability		Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet
Fire Rating		ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	-

		SPMWG6	SPM600FW/R	SPE600FW/R	SPMWG8
Finish		Matte	Matte	Matte	Matte
Color		White	White	White	White
Adhesive		Microsphere Removable - W79	High-Peel Removable - R45	High-Peel Removable - R45	Microsphere Removable - W79
Film		Calendered Vinyl	Calendered Vinyl	Calendered Vinyl	Calendered Vinyl
Liner		90# Layflat	90# Layflat	90# Layflat w/ Air-Egress	90# Layflat
Opacity		95% Minimum	95% Minimum	95% Minimum	97% Minimum
Gloss Level		8% Typical	10% Typical	10% Typical	8% Typical
Thickness	Film	5.5 ± 0.2 mil	5.5 ± 0.2 mil	5.5 ± 0.2 mil	6.5 ± 0.2 mil
	Film w/ Adhesive	6.2 ± 0.2 mil	6.5 ± 0.2 mil	7.5 ± 0.2 mil	7.2 ± 0.2 mil
	Total Thickness	12.5 ± 0.4 mil	13.0 ± 0.4 mil	13.5 ± 0.4 mil	13.5 ± 0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in	33 - 37 oz/in	23-27oz/in	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in	48 - 52 oz/in	43-47 oz/in	23-27 oz/in
Weight	Film w/ Adhesive	215-220 gsm	220-225 gsm	220-225 gsm	245-250 gsm
	Total w/ Liner	355-365 gsm	370-375 gsm	380-385 gsm	400-410 gsm
Printability		Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent
Fire Rating		ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	-

## HP Indigo

Physical Properties		SPMWG6IN
Finish		Matte
Color		White
Adhesive		Microsphere Removable - W79
Film		Calendered Vinyl
Liner		90# Layflat
Opacity		95% Minimum
Gloss Level		8% Typical
Thickness	Film	5.5 ± 0.2 mil
	Film w/ Adhesive	6.2 ± 0.2 mil
	Total Thickness	12.5 ± 0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in
Weight	Film w/ Adhesive	215-220 gsm
	Total w/ Liner	360-370 gsm
Printability		HP Indigo
Fire Rating		ASTM E84 Class 1 or A

## TECHNICAL DATA ▶

Conditions for Use		
Shelf Life		1 year
Clean Removability	W79	Up to 1 year
	R45	Up to 6 months
Outdoor Durability		Up to 3 years
Min Application Temp		40° F (4° C)
Service Temp Range		-20° to 150° F (-29° to 66° C)
Solvent Resistance		Good*
Water Resistance		Excellent

### CPSIA Compliant

\*Good for most petroleum solvents and lower aliphatic alcohols.  
For ultimate solvent resistance, edge sealing is recommended.

### Additional Information:

- Augusta Wall Graphics® is not suitable for overlaminates.
- For installation instructions, visit our website.

## Wide Format

Physical Properties		SPMWGW	SPMWG6G	SPMAUG	SPMWGPP
Finish		Matte	Gloss	Embossed Matte	Matte
Color		White	White	White	White
Adhesive		Microsphere Removable - W79	Microsphere Removable - W79	Microsphere Removable - W79	Microsphere Removable - W79
Film		Calendered Vinyl	Calendered Vinyl	Calendered Vinyl	Polypropylene
Liner		90# Layflat	90# Layflat	90# Layflat	90# Layflat
Opacity		92% Minimum	95% Minimum	95% Minimum	85% Minimum
Gloss Level		8% Typical	90% Typical	2% Typical	8% Typical
Thickness	Film	3.2 ± 0.2 mil	5.5 ± 0.2 mil	6 ± 0.2 mil	3.6 ± 0.2 mil
	Film w/ Adhesive	3.9 ± 0.2 mil	6.5 ± 0.2 mil	6.7 ± 0.2 mil	4.3 ± 0.2 mil
	Total Thickness	10.5 ± 0.4 mil	13.0 ± 0.4 mil	13.2 ± 0.4 mil	10.8 ± 0.5 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in	16 - 20 oz/in	16-20 oz/in	10-15 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in	23- 27 oz/in	23-27 oz/in	13-17 oz/in
Weight	Film w/ Adhesive	130-135 gsm	210-215 gsm	265-270 gsm	105-115 gsm
	Total w/ Liner	280-290 gsm	360-365 gsm	410-420 gsm	220-260 gsm
Printability		Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet
Fire Rating		ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	-

		SPMWG6	SPM600FW/R	SPE600FW/R	SPMWG8
Finish		Matte	Matte	Matte	Matte
Color		White	White	White	White
Adhesive		Microsphere Removable - W79	High-Peel Removable - R45	High-Peel Removable - R45	Microsphere Removable - W79
Film		Calendered Vinyl	Calendered Vinyl	Calendered Vinyl	Calendered Vinyl
Liner		90# Layflat	90# Layflat	90# Layflat w/ Air-Egress	90# Layflat
Opacity		95% Minimum	95% Minimum	95% Minimum	97% Minimum
Gloss Level		8% Typical	10% Typical	10% Typical	8% Typical
Thickness	Film	5.5 ± 0.2 mil	5.5 ± 0.2 mil	5.5 ± 0.2 mil	6.5 ± 0.2 mil
	Film w/ Adhesive	6.2 ± 0.2 mil	6.5 ± 0.2 mil	7.5 ± 0.2 mil	7.2 ± 0.2 mil
	Total Thickness	12.5 ± 0.4 mil	13.0 ± 0.4 mil	13.5 ± 0.4 mil	13.5 ± 0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in	33 - 37 oz/in	23-27oz/in	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in	48 - 52 oz/in	43-47 oz/in	23-27 oz/in
Weight	Film w/ Adhesive	215-220 gsm	220-225 gsm	220-225 gsm	245-250 gsm
	Total w/ Liner	355-365 gsm	370-375 gsm	380-385 gsm	400-410 gsm
Printability		Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent	Latex, UV Inkjet, Eco-Solvent, Solvent
Fire Rating		ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	ASTM E84 Class 1 or A	-

## HP Indigo

Physical Properties		SPMWG6IN
Finish		Matte
Color		White
Adhesive		Microsphere Removable - W79
Film		Calendered Vinyl
Liner		90# Layflat
Opacity		95% Minimum
Gloss Level		8% Typical
Thickness	Film	5.5 ± 0.2 mil
	Film w/ Adhesive	6.2 ± 0.2 mil
	Total Thickness	12.5 ± 0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in
Weight	Film w/ Adhesive	215-220 gsm
	Total w/ Liner	360-370 gsm
Printability		HP Indigo
Fire Rating		ASTM E84 Class 1 or A