



MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL



One product, endless applications. Create floor, wall, and countertop graphics with one universal media ... Trifecta®.

Trifecta

Print, Apply, Done - No overlamine film required, saving time and materials

Durable 6 mil semi-rigid matte white textured vinyl facestock rated for < 3 years of outdoor use, ensuring long last performance

High opacity and bright white point delivers vibrant, high impact printed graphics

Reliable clear adhesive removes cleanly from both indoor and outdoor surfaces for < 1 year without leaving a trace of residue behind

Stable 90# layflat polycoated liner ensures smooth feeding, precise cutting, and easy installation without curling or shifting

UL 410 slip resistance certified

ASTM E84 Class 1 or A fire rated

Print Compatibility: Wide Format (Solvent, Eco-Solvent, Latex and UV), UV Offset and Screen

When to use Trifecta

One-Step Floor Graphics - Create UL 410 slip resistant floor graphics in one easy step... no overlamine required. Easy to install and remove. Trifecta® is suitable for indoor short term floor graphics (<6 months).

Wall Graphics - Hassle free textured wall graphics - peel, stick, done. No need for tapes, tacks, or nails and will remove cleanly from painted dry wall.

Countertop Graphics - Promote impulse buys, deliver essential information, enhance your space and more with a dimensional textured finish that creates a positive customer experience.

SCAN HERE FOR
FREE SAMPLES ▶



Certified for
HP Latex Inks



Applications

One-Step Floor Graphics

Wall Graphics

Countertop Graphics

Retail P.O.P. Graphics

Directional & Wayward Signage

Short-Term Event Signage

Hospitality Signage

Promotional & Sale Graphics

Museum & Exhibit Graphics

Venue & Stadium Signage

Wall Murals

Floor Advertisements



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM


02.06.25 | M1477-0V



STOCKED PRODUCTS ▶

Wide Format	Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	Rolls/Carton
	Textured Matte White	SPMTRI54100	54" x 100 ft	6 mil	Universal Removable	90# Layflat	1

Easy to apply and remove from these surfaces:

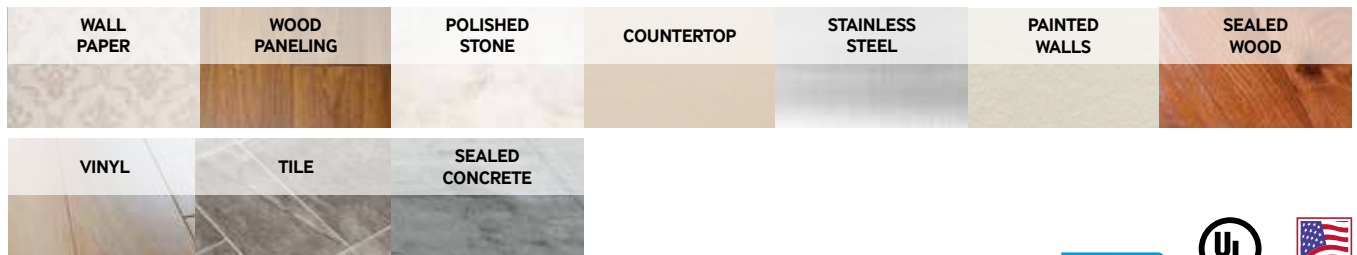



MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL



CUSTOM SIZE OFFERING ▶

Finish/Color	SKU #	Size (width)	Film Thickness	Adhesive	Liner	Wgt/MSI
Non Top Coated - UV Offset, Screen						
Textured Matte White	TRIFECTA	54"	6 mil	Universal Removable	90# Layflat	.64#

Custom Size Offering: Custom converted sheet and roll options available to meet your specific requirements.





MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL

TECHNICAL DATA ▶

Physical Properties		Trifecta
Finish		Textured
Color		White
Adhesive		Universal Removable - UR1
Film		Calendered Vinyl
Liner		90# Layflat
Opacity		95% Minimum
Gloss Level		2% Typical
Thickness	Film	6 ± 0.2 mil
	Film w/ Adhesive	6.7± 0.2 mil
	Total Thickness	13.2±0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in
Weight	Film w/ Adhesive	265-270 gsm
	Total w/ Liner	410-420 gsm
Slip Resistant Certification		UL 410
Fire Rating		ASTM E84 Class 1 or A

Conditions for Use	
Shelf Life	1 year
Clean Removability	Up to 1 year
Outdoor Durability	Up to 3 years
Min Application Temp	40° F (4° C)
Service Temp Range	-20° to 150° F (-29° to 66° C)
Solvent Resistance	Good*
Water Resistance	Excellent

CPSIA Compliant

*Good for most petroleum solvents and lower aliphatic alcohols.
For ultimate solvent resistance, edge sealing is recommended.

Additional Information:

- Indoor Floor Graphics - Trifecta® is suitable for indoor short term floor graphics (<6 months). *Not intended for outdoor floor graphic applications. For the best results, we recommend printing floor graphics with UV inks to avoid potential scuffing.
- Outdoor Applications - Trifecta® is suitable for outdoor graphics for up to 3 years. For the best results, we recommend using an edge sealer on graphics that will be outdoors for longer than 6 months.

Certified for
HP Indigo

HP CERTIFIED:
HP Latex 110, 115, 310, 315, 330, 335, 360, 365, 370, 375, 560, 570, 700/800 series

The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

02.06.25