



MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL



One print media, multiple surfaces, maximum efficiency - floor, wall, countertop, and environmental graphics made simple with Trifecta®.

Trifecta®

Print. Apply. Done. – No overlamine film required, reducing production time, material costs, and labor for quick turnaround jobs

Three Textured Finishes – Available in canvas, sand, and linen – three bright white 6 mil textured finishes designed to elevate visual impact across diverse environments

Multi-Surface Solution – Performs on a wide range of smooth surfaces, including painted walls, wallpaper, wood paneling, concrete, and polished stone

Removable & Repositionable – Clean removal from a wide range of interior application surfaces within one year, leaving no adhesive residue behind

Stable Layflat Liner – 90# polycoated liner ensures smooth feeding, precise cutting, and efficient installation without curling or shifting

Fire Rated Performance – ASTM E84 Class 1 (A) fire rating for use in commercial interiors requiring flame spread compliance

Print Compatibility: Wide Format (Eco-Solvent/Solvent, Latex, UV), UV Offset, Screen

When to use Trifecta

One-Step Floor Graphics – Produce interior, short-term UL 410 certified slip-resistant floor graphics in a single step without lamination

Wall Graphics – Install textured wall graphics easily without tape, tacks, or mechanical fasteners

Countertop Graphics – Promote impulse buys and communicate essential messages with cleanly removable point-of-purchase graphic

SCAN HERE FOR
FREE SAMPLES ►



Applications

One-Step Floor Graphics
Wall Graphics & Murals
Countertop Graphics
Environmental & Brand Graphics
Point-of-Purchase Displays
Directional & Wayfinding Signage
Short-Term Event Signage
Hospitality & Venue Graphics
Promotional & Sale Graphics
Museum & Exhibit Displays
Venue & Stadium Signage
Architectural & Experiential Graphics

Certified for
HP Latex Inks
TRIFECTA CANVAS,
HP CERTIFIED




800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

08.19.26 | M1477-OV



MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL

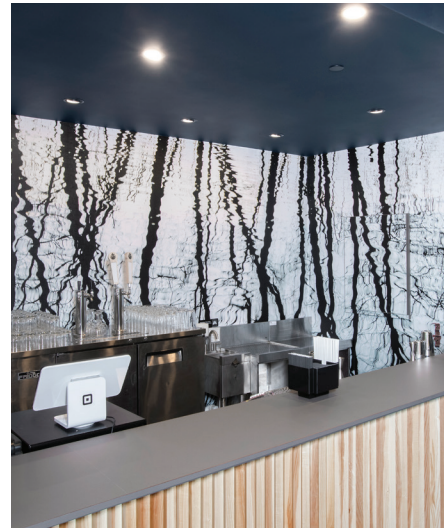

STANDARD SIZES ▶

Finish/Color	SKU #	Roll Size	Film Thickness	Adhesive	Liner	Rolls/Carton	Outdoor Durability
Wide Format							
Canvas - Textured Matte White*	TF10154F (SPMTRI54100) \$	54" x 100 ft	6 mil	Universal Removable	90# Layflat Paper	1	3 years
	TF10160F \$	60" x 100 ft	6 mil	Universal Removable	90# Layflat Paper	1	3 years
Sand - Textured Matte White	TF10254F \$	54" x 100 ft	6 mil	Universal Removable	90# Layflat Paper	1	3 years
Linen - Textured Matte White	TF10354F \$	54" x 100 ft	6 mil	Universal Removable	90# Layflat Paper	1	3 years




NEKOOSA BUCKS

available in select rolls listed above.


Each Trifecta® finish is UL 410 certified and suitable for short-term, interior floor graphics for <6 months.

*Trifecta® Canvas is the original pattern of Trifecta.

Available in 3 finishes

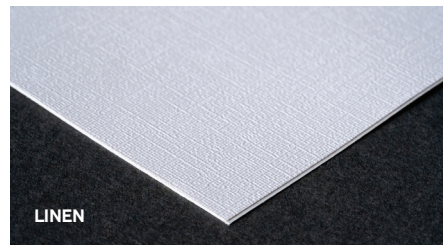

Easy to apply and remove from these surfaces:

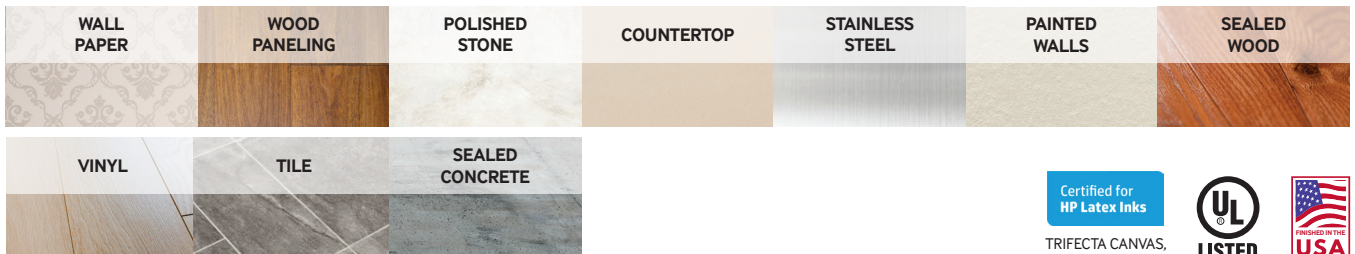

Certified for
HP Latex Inks
TRIFECTA CANVAS,
HP CERTIFIED



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

08.19.26



MULTIPURPOSE REMOVABLE
PRESSURE SENSITIVE TEXTURED VINYL

TECHNICAL DATA ▶

		TF101	TF102	TF103
Physical Properties & Conditions for Use				
Film	Type	Calendered Vinyl	Calendered Vinyl	Calendered Vinyl
	Pattern	Canvas	Sand	Linen
	Finish	Matte	Matte	Matte
	Color	White	White	White
	Opacity	95% Minimum	95% Minimum	95% Minimum
	Gloss Level	4% Typical	4% Typical	4% Typical
	Outdoor Durability Rating	3 Years	3 Years	3 Years
Adhesive	Strength	Removable	Removable	Removable
	Color	Clear	Clear	Clear
Liner		90# Layflat Paper	90# Layflat Paper	90# Layflat Paper
Thickness	Film	6 ± 0.5 mil	6 ± 0.5 mil	6 ± 0.5 mil
	Film w/Adhesive	6.8± 0.5 mil	6.8± 0.5 mil	6.8± 0.5 mil
	Total Thickness	13.5±0.4 mil	13.5±0.4 mil	13.5±0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-23 oz/in	16-23 oz/in	16-23 oz/in
	SS 24 hr Room Temp Dwell	23-32 oz/in	23-32 oz/in	23-32 oz/in
Weight	Film w/Adhesive	265-275 gsm	280-290 gsm	280-290 gsm
	Total w/Liner	410-420 gsm	420-430 gsm	420-430 gsm
Repositionable		Yes	Yes	Yes
Minimum Application Temperature		40° F (4° C)	40° F (4° C)	40° F (4° C)
Service Temperature Range		-20° to 150° F (-29° to 66° C)	-20° to 150° F (-29° to 66° C)	-20° to 150° F (-29° to 66° C)
Clean Removability		1 Year	1 Year	1 Year
Solvent Resistance		Good*	Good*	Good*
Water Resistance		Excellent	Excellent	Excellent
Certifications	Slip Resistance	UL 410	UL 410	UL 410
	Fire Rating	Class 1 (A)	Class 1 (A)	Class 1 (A)
	CPSIA	Compliant	Compliant	Compliant

CPSIA Compliant

*Good for most petroleum solvents and lower aliphatic alcohols.
For ultimate solvent resistance, edge sealing is recommended.

Additional Information:

- Indoor Floor Graphics - Trifecta® is suitable for indoor short term floor graphics (<6 months). *Not intended for outdoor floor graphic applications. For the best results, we recommend printing floor graphics with UV inks to avoid potential scuffing.
- Outdoor Applications - Trifecta® is suitable for outdoor graphics for up to 3 years. For the best results, we recommend using an edge sealer on graphics that will be outdoors for longer than 6 months.
- Good for most petroleum solvents and lower aliphatic alcohols. For ultimate solvent resistance, edge sealing is recommended.
- The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.

Certified for
HP Latex Inks

HP CERTIFIED:
HP Latex 110, 115, 310, 315, 330, 335, 360, 365, 370, 375, 560, 570, 700/800 series

TRIFECTA CANVAS,
HP CERTIFIED

The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.



800.826.4886 | sales@nekoosa.com

NEKOOSA.COM

08.19.26